


INSTALLATION
INSTRUCTIONS


1 x DUAL VOLTAGE SHAVER SOCKET CHROME




CODE: SE3013400

IMPORTANT: Please read these instructions before commencing installation and retain for future reference.

Components




1 x SE3013400 dual shaver socket



1 x instructions

Tools required



Screw Driver

Important Safety Information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference.

We recommend that you consult a qualified electrician. All electrical installation must be carried out in accordance with current IEE wiring regulations (BS7671).

These products must not be modified, if any modifications are made, it may invalidate the warranty and may render the product unsafe.

Before use please read carefully and use in accordance with this safety wiring instructions.

This product features :

- 110V/240V dual voltage output.
- 20VA double wound isolating transformer.
- Safety interlocked device to prevent insertion of two plugs simultaneously.
- Built-in retrievable over-current and temperature protection service.
- Accepts shaver plugs to british, America, Australian and European Standards.
- Always switch off the mains supply before servicing or fitting.

Safety Instructions

1. Before commencing installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
2. This product is only suitable for connecting to a 240V 50Hz supply.
3. The socket should be recessed into a secure surface.

4. Class I appliance efficiency rating.

Waste Electrical & Electronic Equipment (WEEE)


The symbol on the product, or on the document accompanying the product, the crossed out wheellie bin symbol, indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.



RoHS
Compliant ✓



Installation

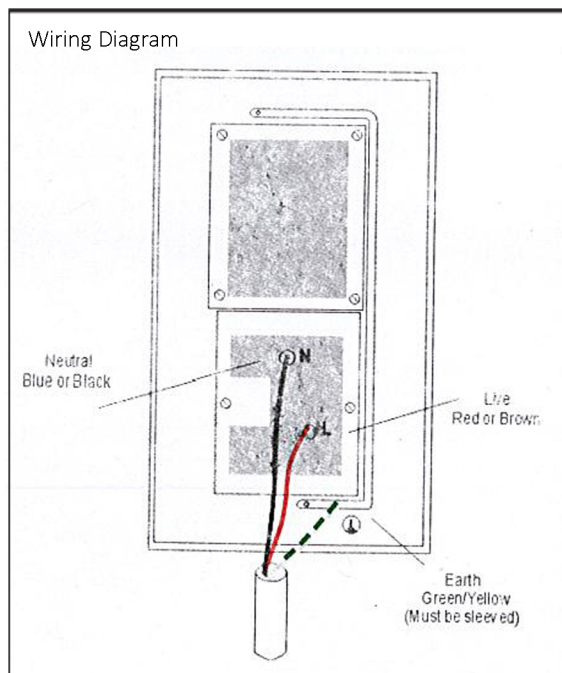

If using the new socket to replace an old socket:

- Release the faceplate retaining screws and support the product as you remove it from the wall.
- It is essential that the new product is wired up in the same way as the old one.
- The simplest way is either to label each conductor with the location of the terminal to which it connects as you release it, or to transfer one conductor at a time to the corresponding terminal on the new product. (Alternatively refer to the wiring diagram for guidance).
- Before refitting the new product, make sure to double check your connections.
- Place the product into the wall box, ensuring that no wires are trapped.
- Once you are sure that all work has been completed correctly, replace the fuse for the circuit, switch the power back on, and test.

If you are installing from new:

- Shaver sockets can be installed whether by connecting to a ring main with junction box, or from an earthed lighting socket.
- Select the appropriate size of mounting box (metal or patress) for flush or surface mounting.
- Ensure that the mounting box is free of any plaster lumps and projecting screws in the central areas of the box.
- Always use cable of the correct rating.
- Route the cable through the most suitable entry point of the mounting box. If a metal box is used, ensure that a protective cable grommet is fitted.
- Carefully arrange the wiring so as to lie along the edges of the product box, keeping the central area clear.
- The feed supply should be at least 1.0mm 2*3 core wire (2 core with earth).
- Insert the bare end of the live wire (Brown or Red) to the terminal marked "L" and tighten securely. Ensure no bare wires are visible.
- Insert the bare end of the Neutral wire (Blue or Black) to the terminal marked "N" and tighten securely. Ensure no bare wires are visible.
- Insert the bare end of the Earth wire (Green & Yellow) to the terminal marked and tighten securely. Ensure no bare wires are visible. Please consult the wiring diagram.
- The earth connection should always be made to both the mounting box earth terminal and the shaver socket earth terminal.
- Carefully position the shaver socket into the wall box, ensuring that no wires are trapped between the plate and the wall, fully secure using the fixing screws. Do not over tighten the screws.
- To prevent moisture from entering the socket, due to the formation of condensation on the walls, it is recommended to fill any gaps between the mounting wall and the socket with a suitable waterproof sealant.
- Once you are sure that all work has been completed correctly, replace the fuse for the circuit, switch the power back on and test. The shaver socket is now ready for use.

Maintenance & Care

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with soft cloth periodically.
- Do not use harsh chemical solvents, it may dis-colour or damage the finish.