



## Thermostatic bath mixer for exposed installation # C1522000010

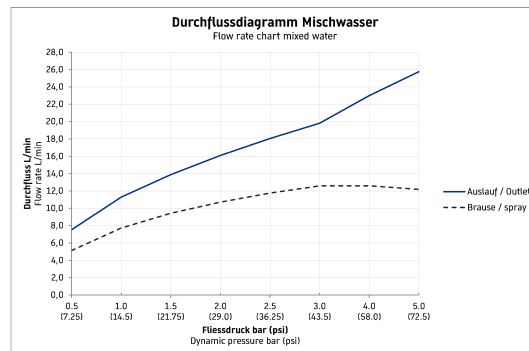

Thermostatic bath mixer for exposed installation	Dimension	Weight	Order number
Thermostatic cartridge, non-return valve in the hose connection,, flow rate 19,8 l/min (3 bar), flow rate hose connection 12,6 l/min (3bar), Normal spray, hose connection DN15, connection size DN15, with shut-off and diverter valve, recommended operating pressure 3 - 5 bar, noise class I			
<b>Colors</b>			
10 Chrome			
<b>Variant</b>			
Surface Chrome, connection type: s-union, centre distance 150 mm ± 15 mm			C1522000010

All drawings contain the necessary measurements which are subject to standard tolerances. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.

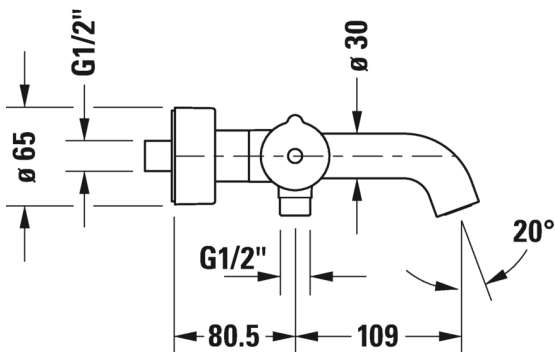

Thermostatic bath mixer for exposed installation #  
C15220000010

---

