


MyPlan 600 WC Unit For Wall Hung Pan Assembly Instructions

41405010820

41405011060




41405011300

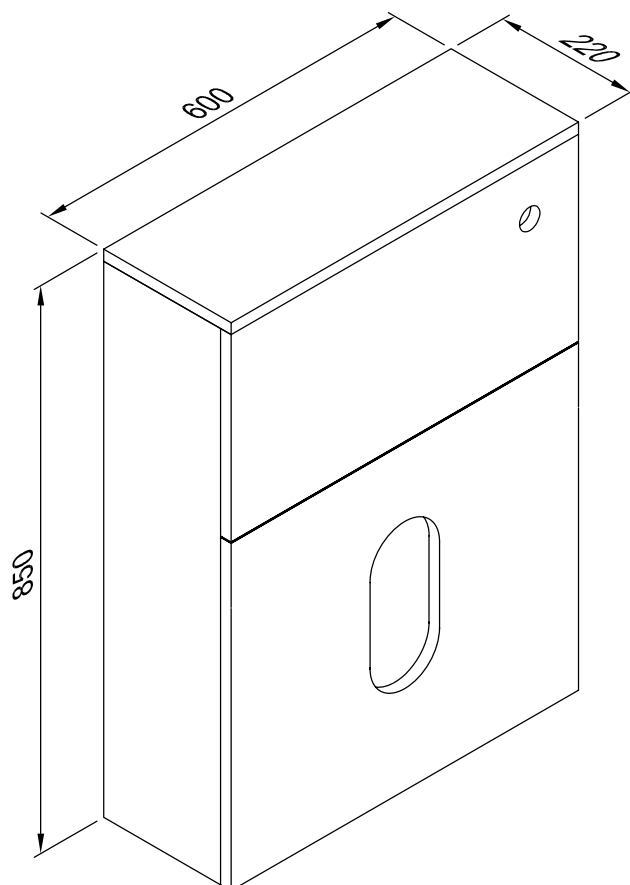

Width 600mm

Depth 220mm


Height 850mm

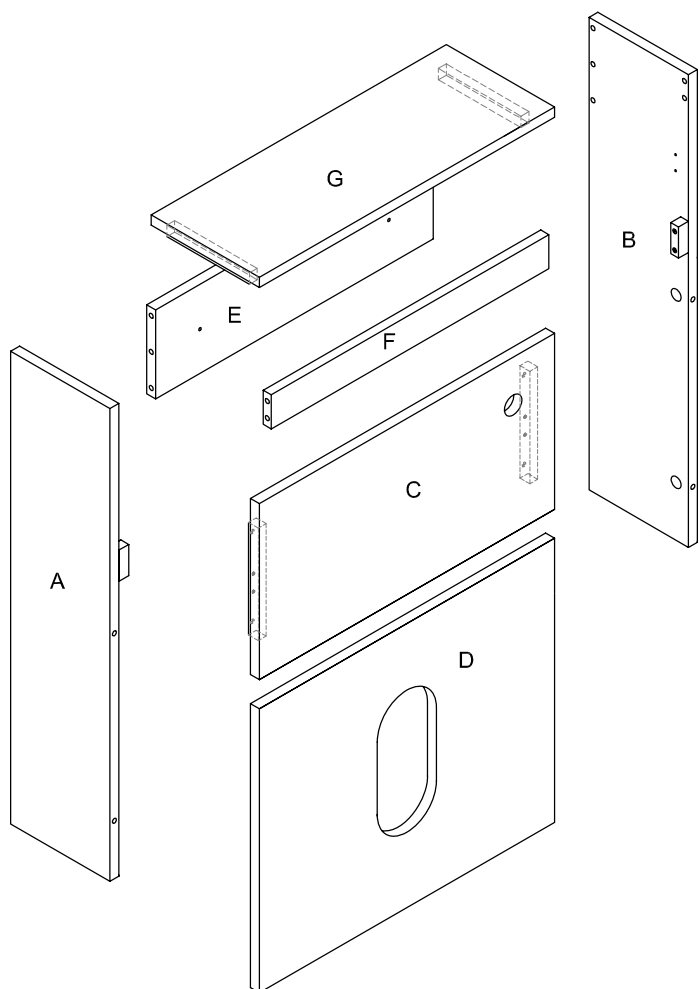TOOLS REQUIRED:


CODE	SIZE (mm)	QTY	CODE	DIAGRAM	QTY
A	832 x 200 x 16 (LH)	1	H		10
B	832 x 200 x 16 (RH)	1	I		10
C	600 x 313 x 18	1	J		4
D	600 x 515 x 18	1	K	 ST4 *14mm	8
E	568 x 157 x 16	1	L		2
F	568 x 60 x 16	1	M		2
G	600 x 220 x 18	1	N		2
			O		2
			P	 ST5 * 50mm	2


Step 1:

If the furniture conceals pipe runs along the wall, please cut out the corners as shown to create the plumbing void before assembly.

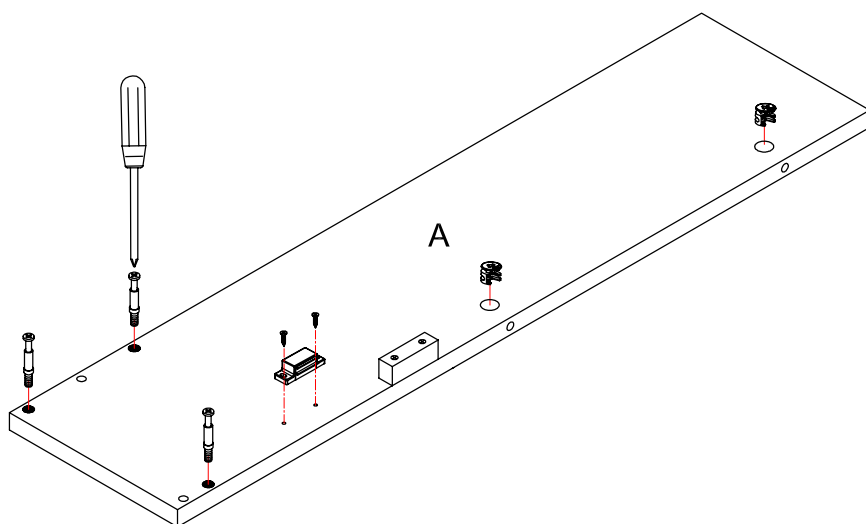


CODE	SIZE/DIAGRAM	QTY
A	832 x 200 x 16	x1
H		x3
I		x2
L		x1
K		x2

Step 2:

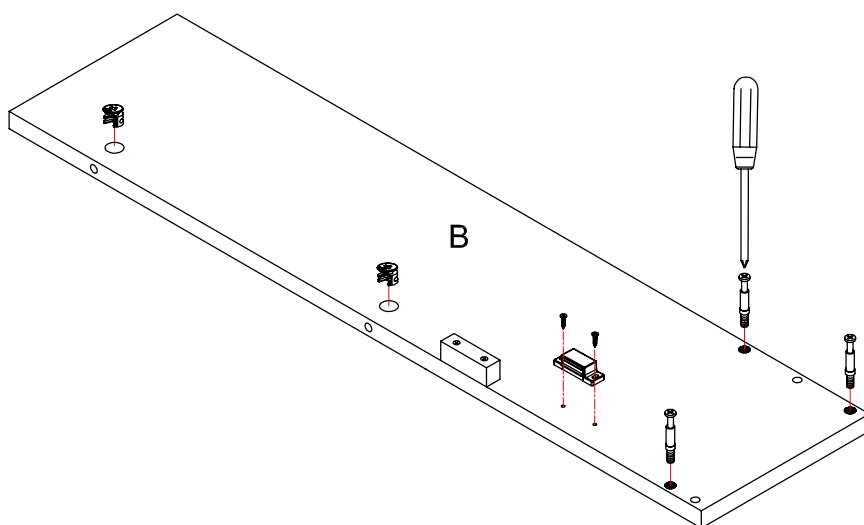

CODE	SIZE/DIAGRAM	QTY
B	832 x 200 x 16	x1
H		x3
I		x2
L		x1
K		x2


Step 3:

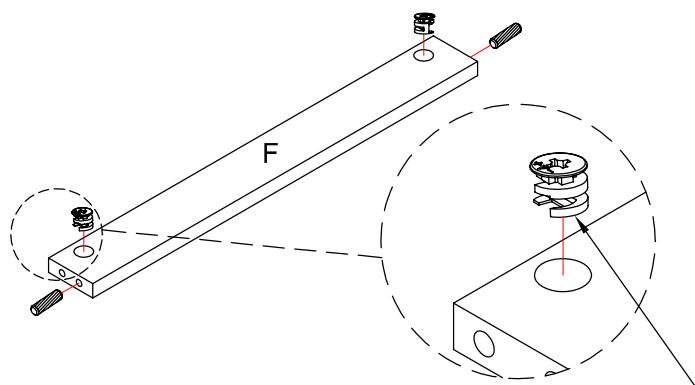

During assembly the arrow stamped on part (I) should point towards the screw hole.


CODE	SIZE/DIAGRAM	QTY
F	568 x 60 x 16	x1
J		x2
I		x2

Step 4:

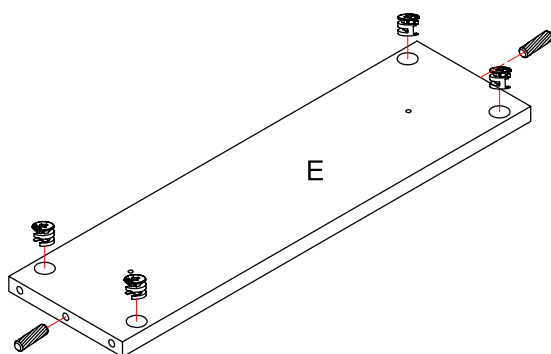


CODE	SIZE/DIAGRAM	QTY
E	568 x 157 x 16	x1
J		x2
I		x4

Step 5:

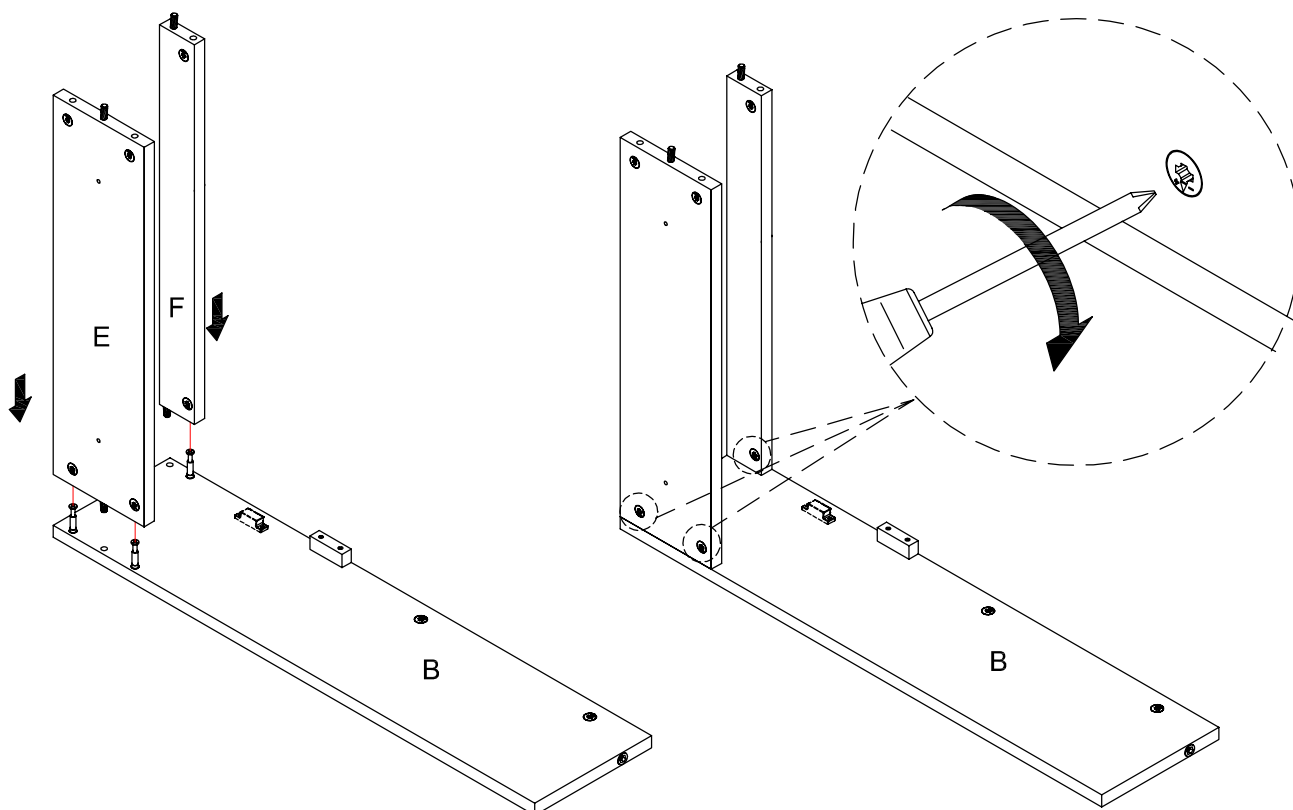


Step 6:

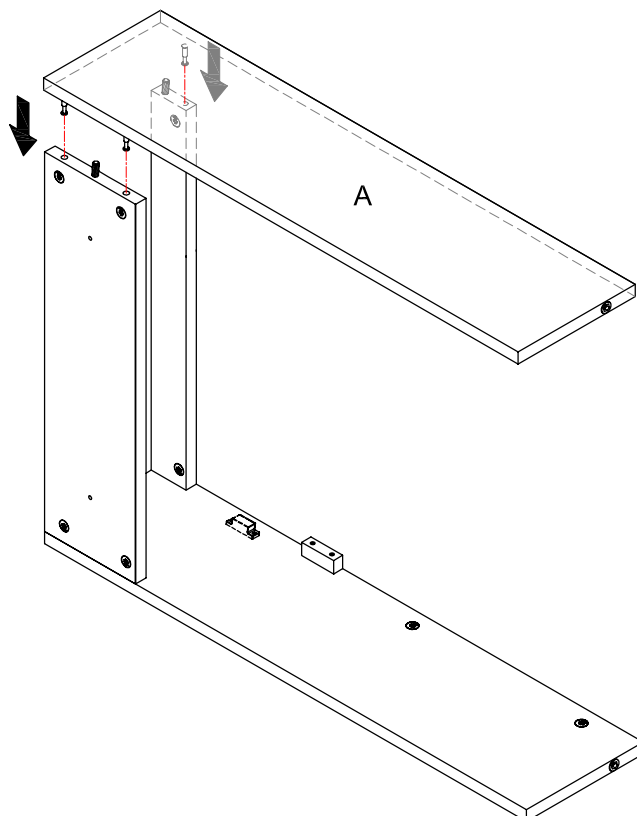



Step 7:

CODE	SIZE/DIAGRAM	QTY
N		x2

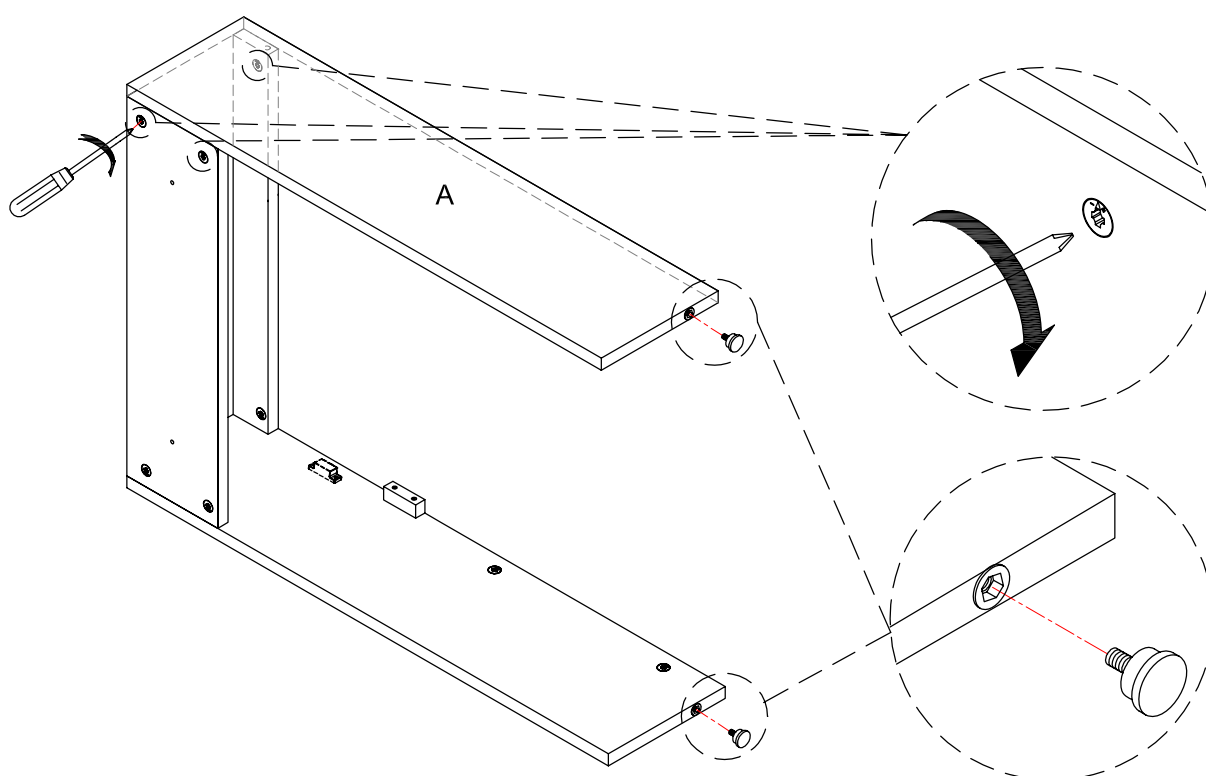


Step 8:

CODE	SIZE/DIAGRAM	QTY
D	600 x 515 x 18	x1
H		x4

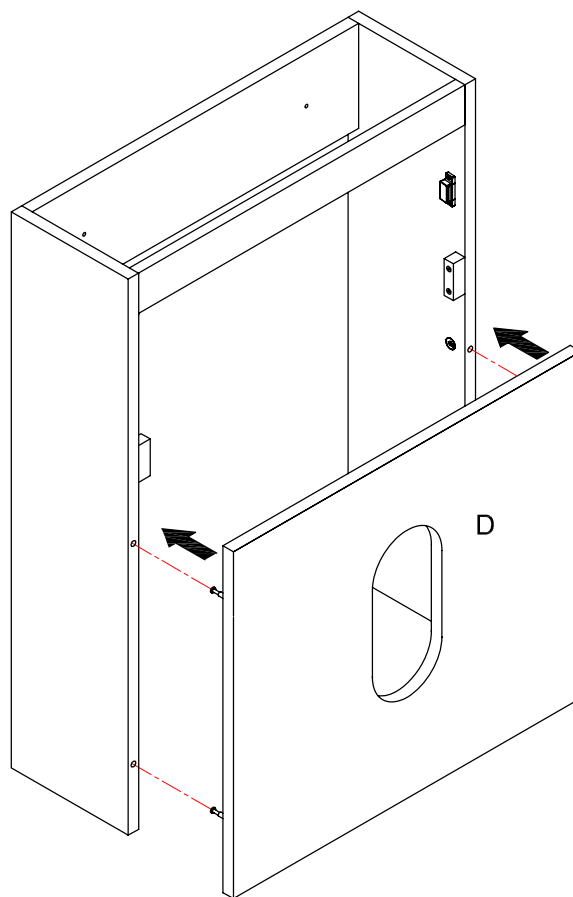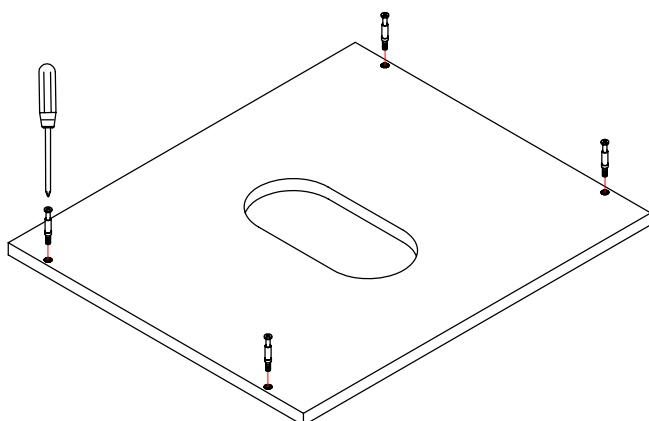

Step 9:

The WC unit should be full assembled before fitting over the WC frame as the internal cams cannot be easily accessed once the unit is fitted.


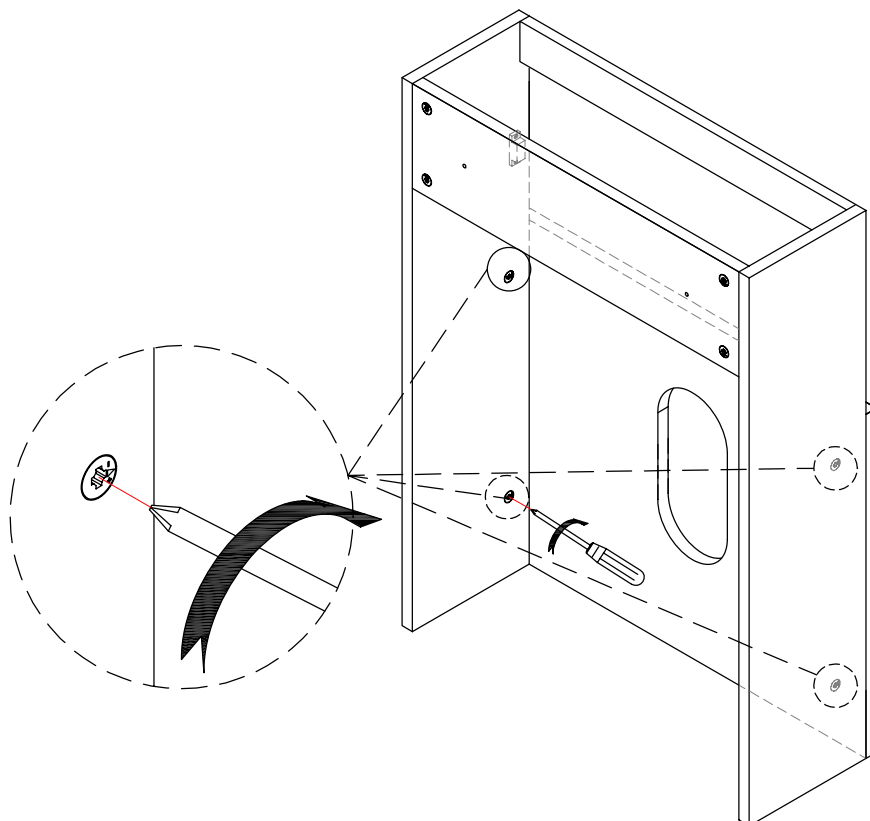


If the pan is set higher than 400mm, to ensure that the cistern isn't higher than the WC cabinet, please remove the front panel and loose fit all parts before proceeding.

Step 10: Place the unit in position against the wall. Raise or lower height adjusters (N) to level and achieve desired height at the front.

Once positioned and levelled identify which are the correct fixing positions for your WC pan and mark the base panel for drilling the fixing holes. If you are unsure please refer to the WC support frame instructions. Then remove the unit and drill the base panel before fixing to the wall.


CODE	SIZE/DIAGRAM	QTY
C	600 x 313 x 18	x1
M		x2
K		x4

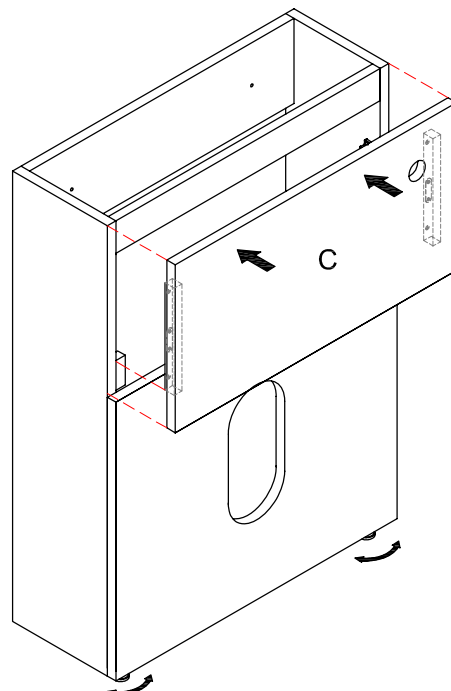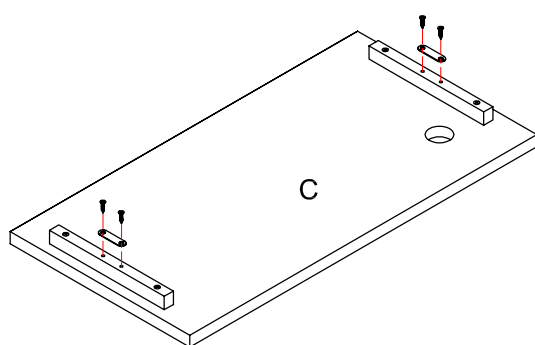

Step 11: Ensure that the top is horizontal before marking the wall for fixing.

The wall fixings supplied may not be suitable for your installation. You may need to source alternatives depending on the material and strength of the wall you are fixing to.

CODE	SIZE/DIAGRAM	QTY
O		x2
P		x2

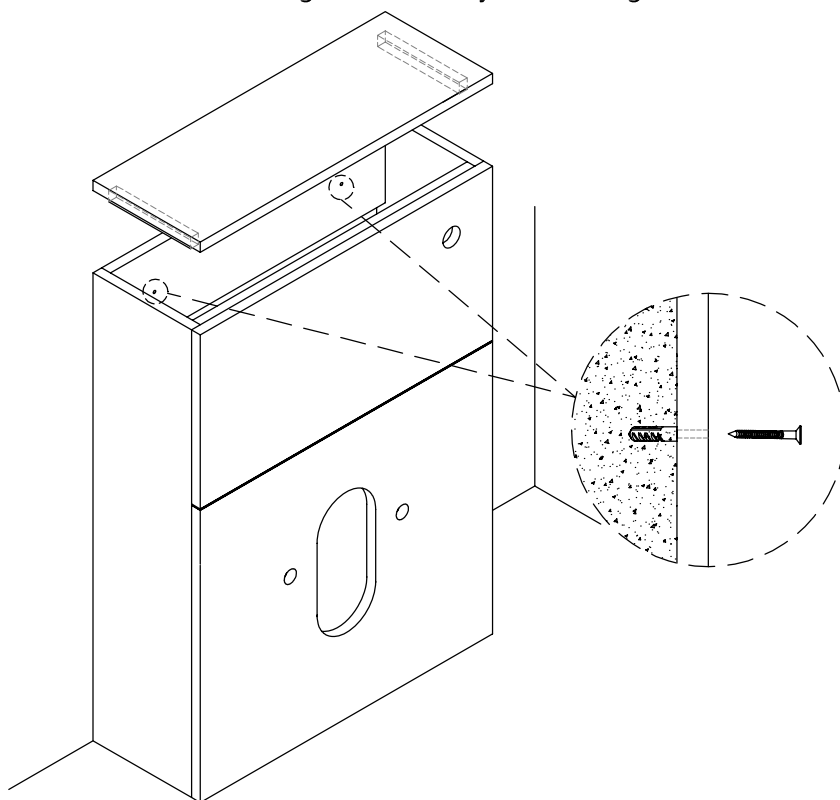



Care and Maintenance

Please leave with the householder

This furniture is made of wood, and has a water resistant finish. It should not be left wet. The quality of the finish is best maintained if it is wiped with a dry cloth after use. It should only be cleaned using a soft damp cloth followed by a dry cloth. Do not use bleach or any abrasive cleaner.

Installation Instructions for MyRoom™ Dual Flush Top & Front Access Concealed Cistern

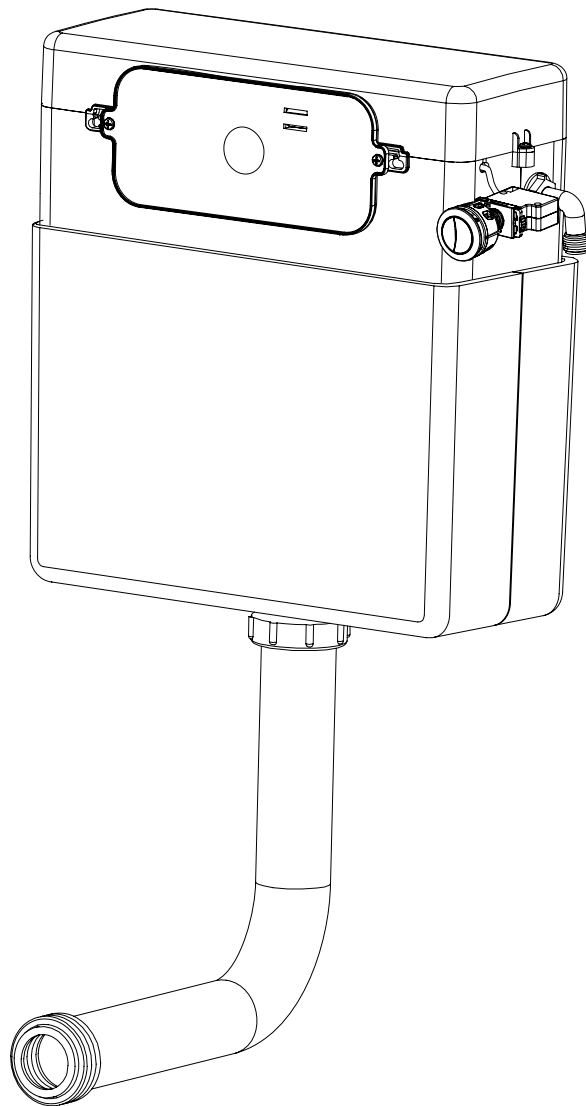


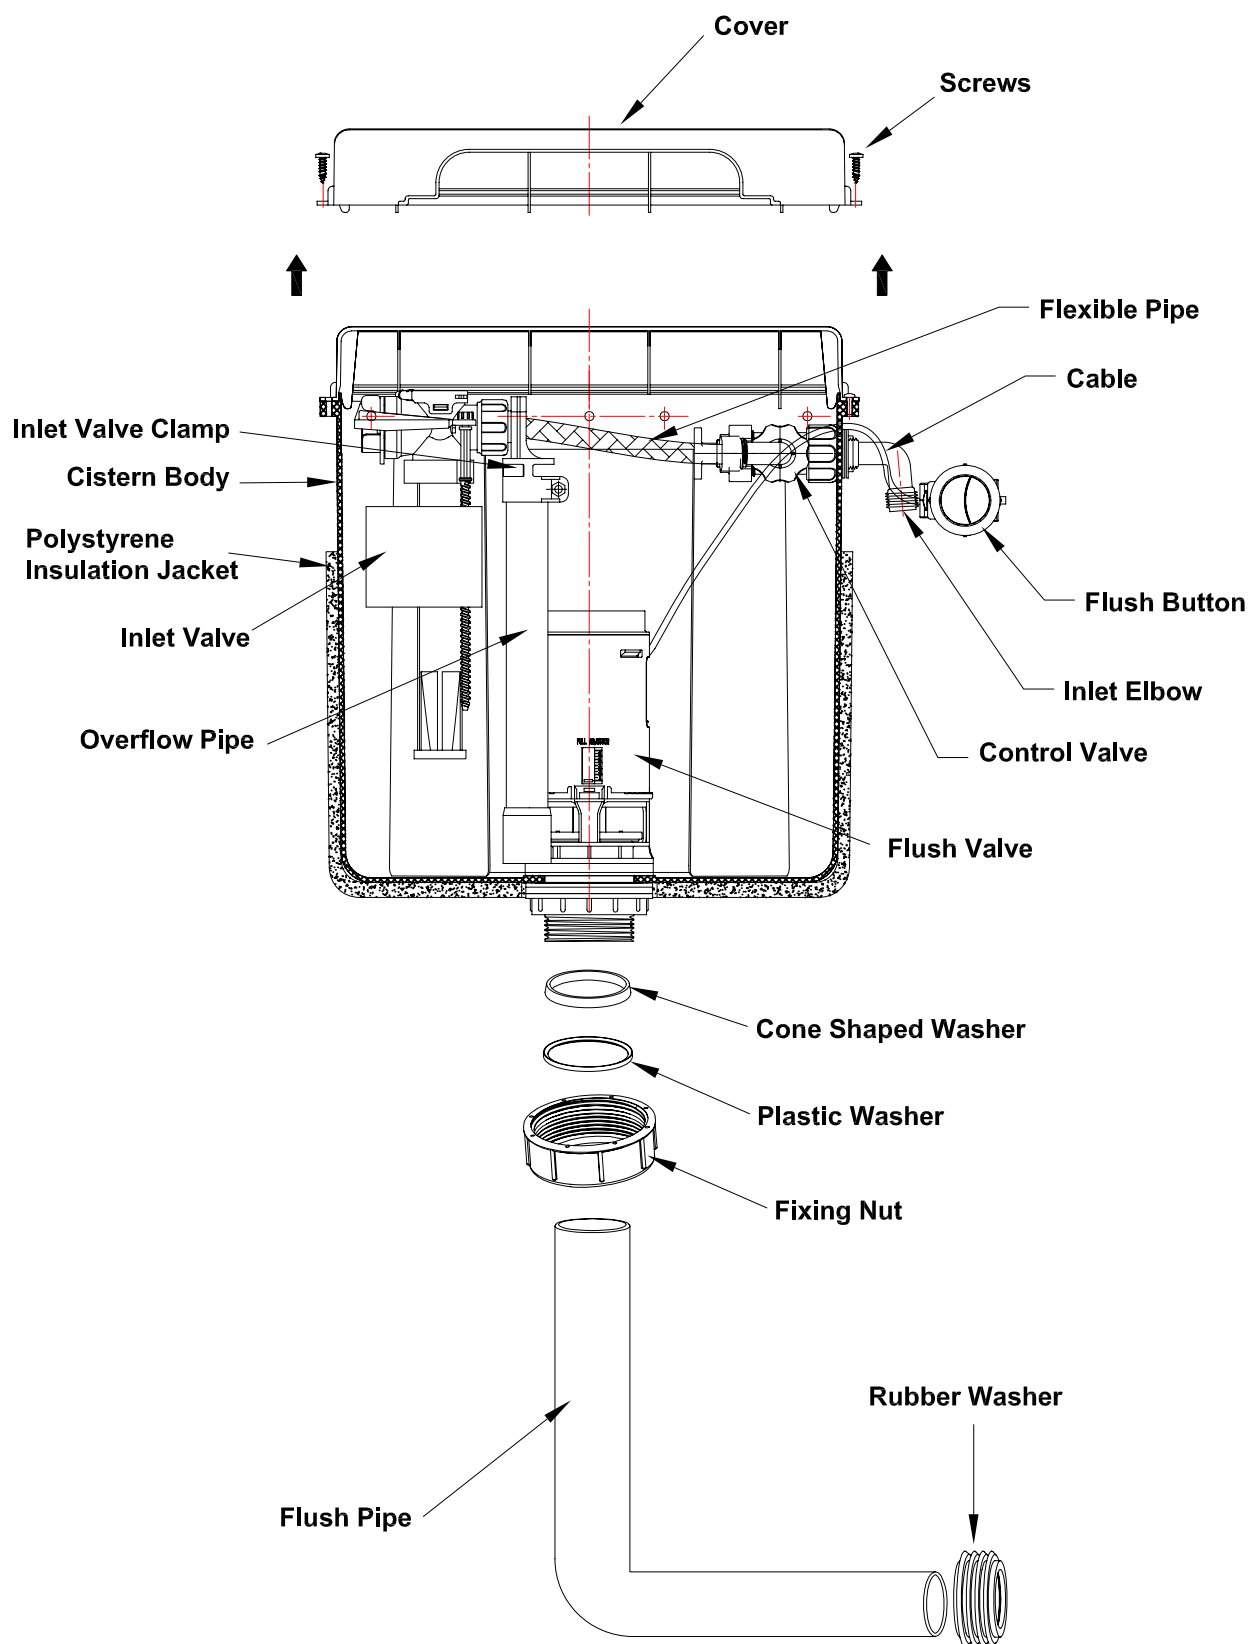

Inlet Valve & Flush Valve Scale Setting


The Inlet Valve & Flush Valve are preset to perform the 6.0L of Full Flush volume and the 3.0L of Half Flush volume. If the preset scale setting need to be adjusted, please follow the diagram below.

6.0 Litre Full Flush Volume
3.0 Litre Half Flush Volume

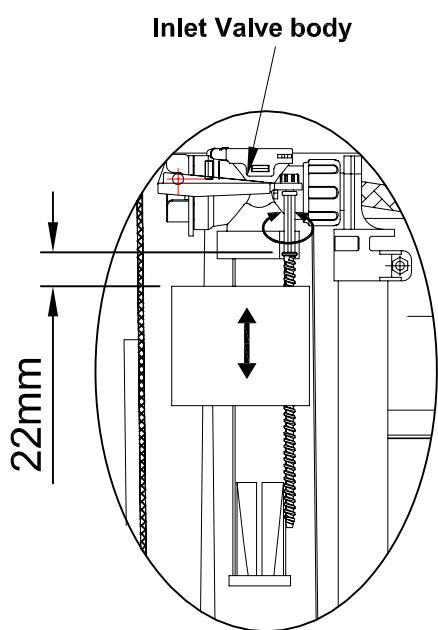

Inlet Valve body

22mm

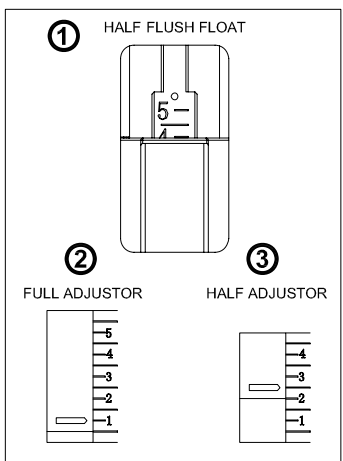

Flush valve body

① Half flush float

② Full flush adjustor


③ Half flush adjustor

① Adjust half flush float:
The half float is set at 4.5, to reach flushing volume of 3.0 litres.
(in this case, the half flush adjustor should be set at 3 as well.)

② Adjust full flush adjustor:
The full flush adjustor is set at 1.5, to reach flushing volume of 6.0 litres.


③ Adjust half flush adjustor:
The half flush adjustor set at 3, to reach flushing volume of 3.0 litres.

4.5 Litre Full Flush Volume
2.6 Litre Half Flush Volume

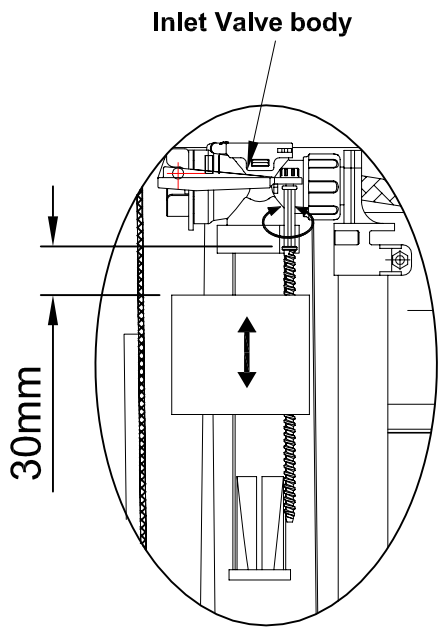

Inlet Valve body

30mm

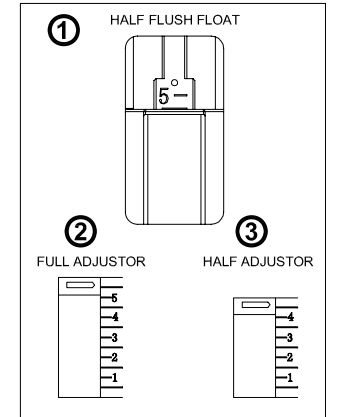

Flush valve body

Half flush float

Full flush adjustor

Half flush adjustor



① Adjust half flush float:
The half float is set at 5, to reach flushing volume of 2.6 litres.
(in this case, the half flush adjustor should be set at "Full Open" as well.)

② Adjust full flush adjustor:
The full flush adjustor is set at "Full Open", to reach flushing volume of 4.5 litres.

③ Adjust half flush adjustor:
The half flush adjustor set at "Full Open", to reach flushing volume of 2.6 litres.

For the further information, please go to the Inlet Valve & Flush Valve Problem Solving pages (6 & 7) .

1. Fit the cable into the slot on the cistern body.
Fix the cistern cover on the cistern using the screws provided.

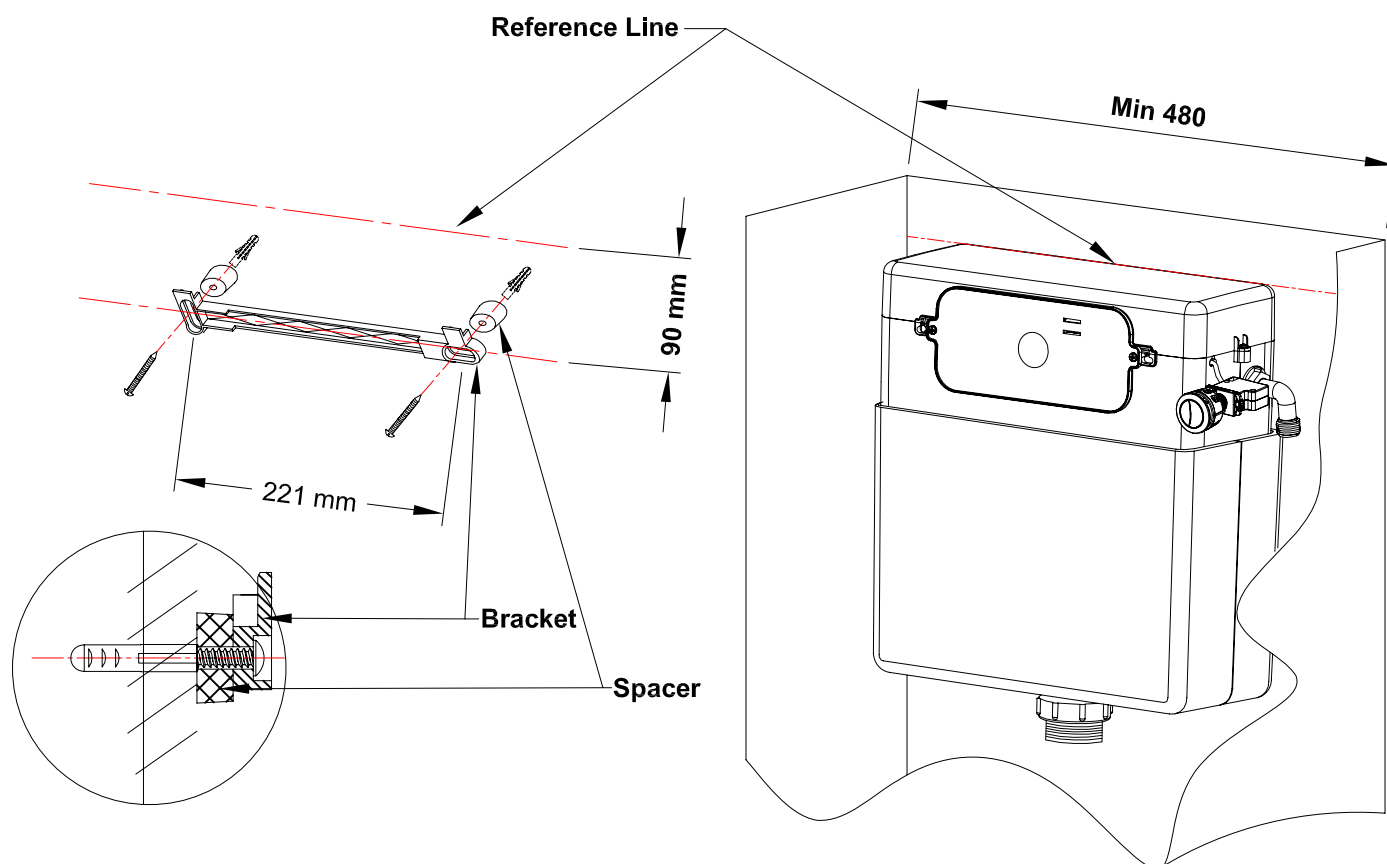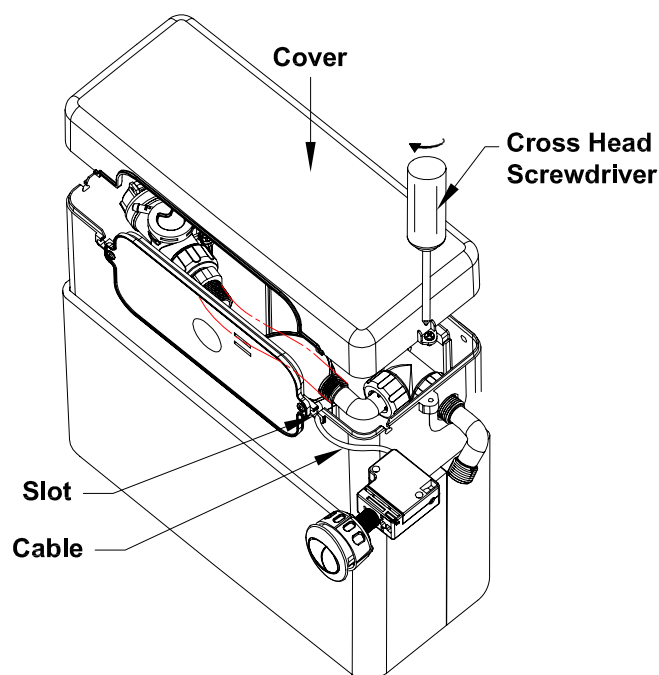

2. Note the minimum width required for this cistern is 480mm.
Place the cistern in the required position and mark a reference line on the wall that coincides with the top of the cistern cover.

Measure a line 90mm below this reference line.

Using a spirit level, mark the two hole positions for the hanging bracket.

Drill the holes, insert wall plugs and fix the bracket using the spacers and the two screws provided.



Clip the cistern to the hanging bracket.


- Place the fixing nut, plastic washer and cone shaped washer over the 50mm diameter end of the flush pipe.

Place the rubber washer over the 44mm diameter end.

Insert the 50mm diameter end of the flush pipe into the cistern. Slide the conical washer and plastic washer up to the outlet and then hand tighten the fixing nut.

The flush pipe should be cut to size (both ends). Minimum height of flush pipe to ensure adequate flushing is 75mm.

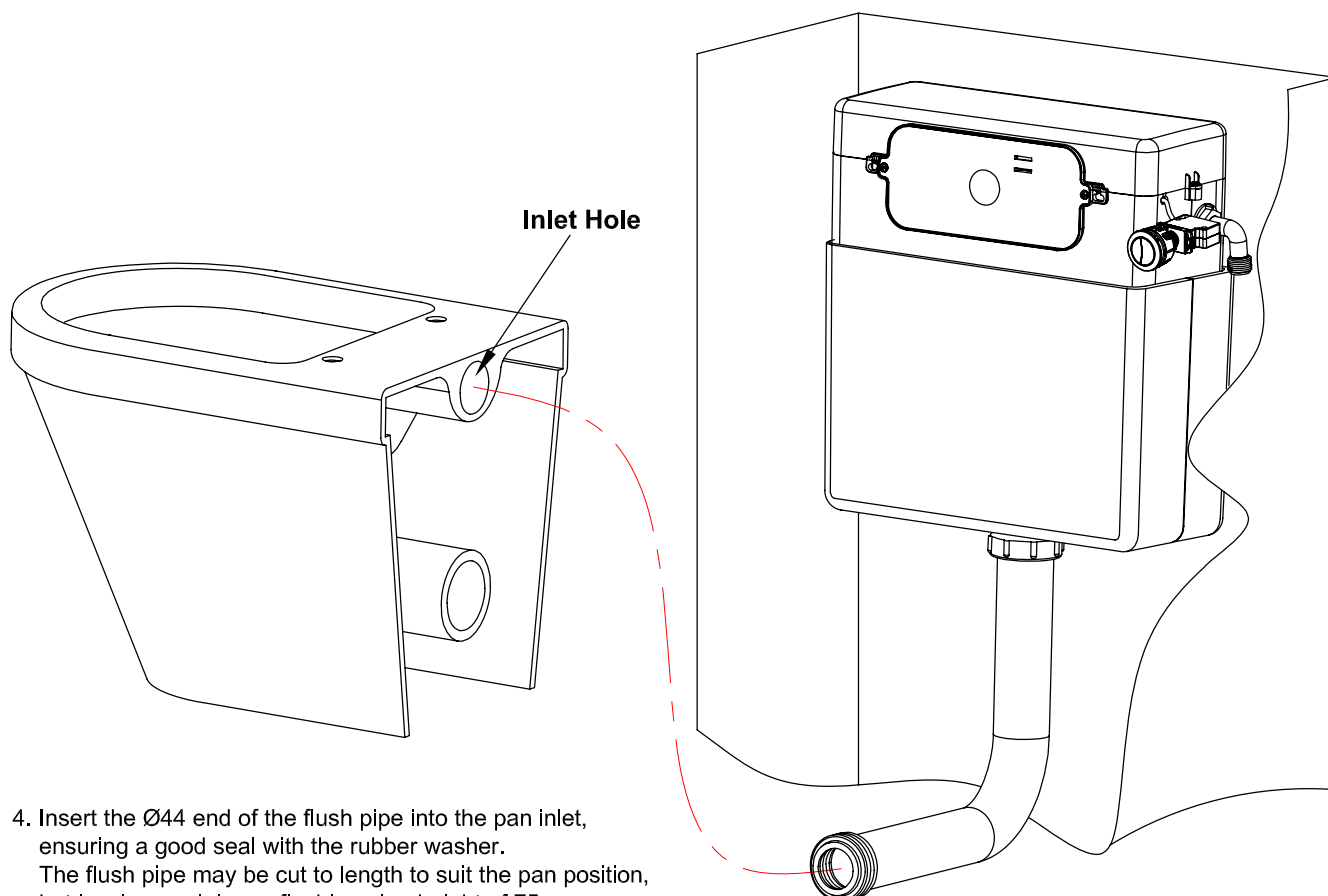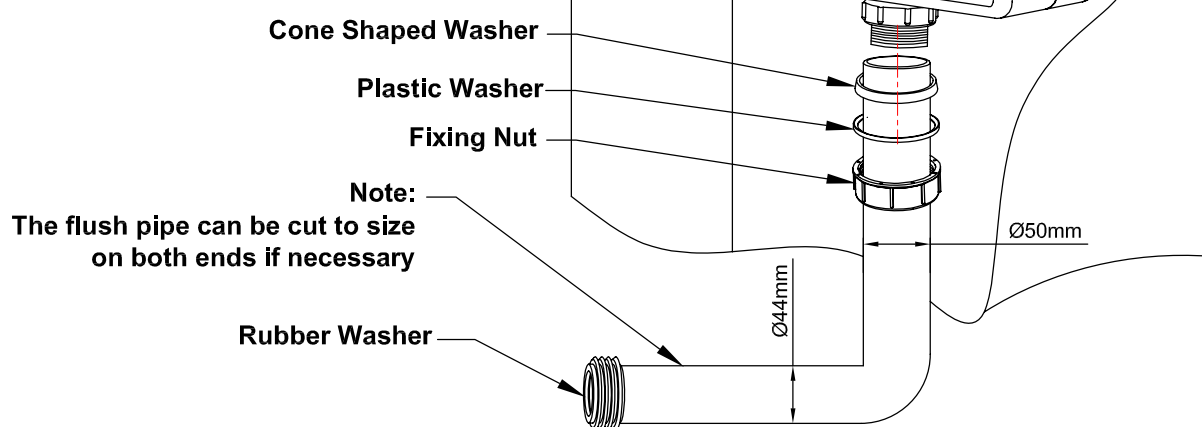

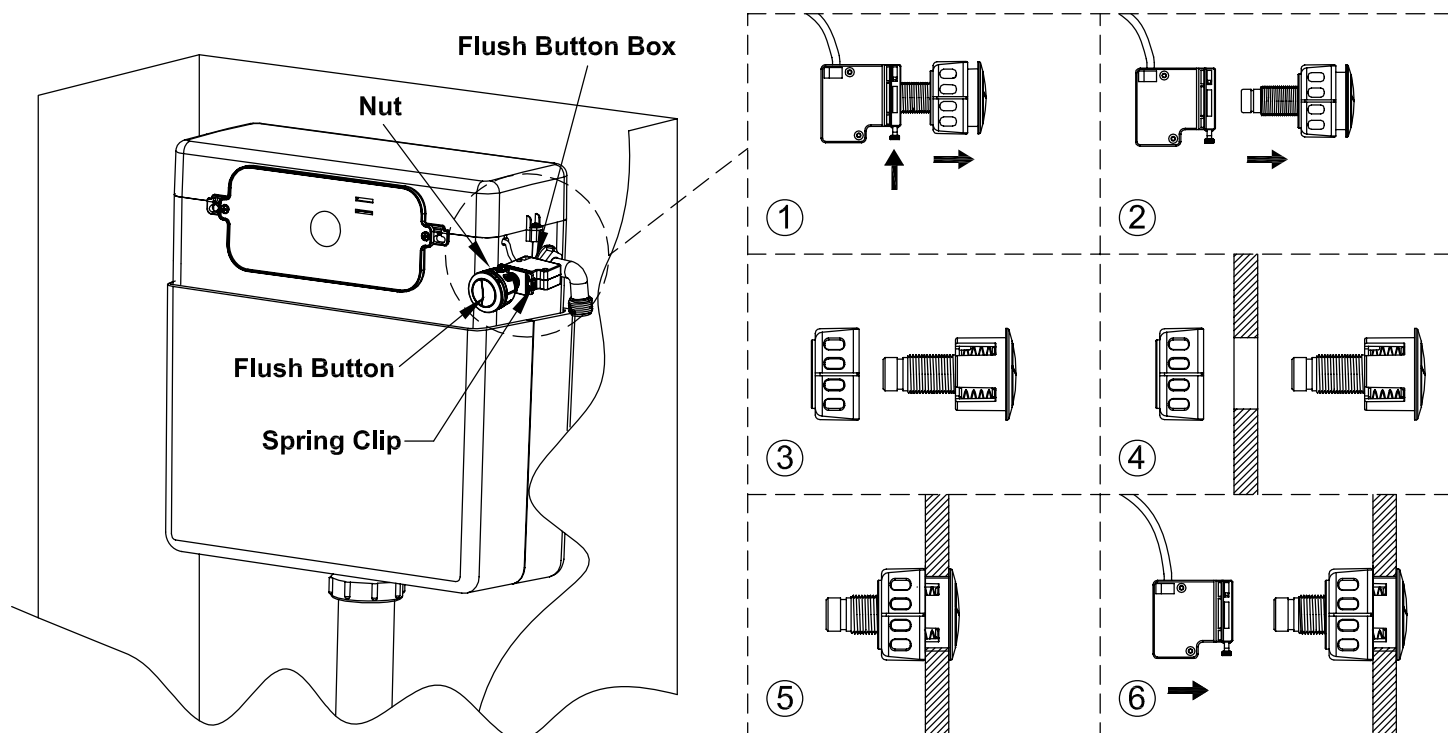


5. Remove the flush button by pressing down on the spring clip. Unscrew the fixing nut and insert the flush button through the cabinet hole. Tighten the flush button with the fixing nut clamping the cabinet between button and nut. From inside press down on the spring clip and insert the box onto the flush button. Make sure that the spring clip is engage. If not press again.

NOTE:

Connect the water supply to the inlet elbow.


After installation check that the full flush and half flush are working correctly.

Please consult the trouble shooting guide on page 7 if there are any problems.

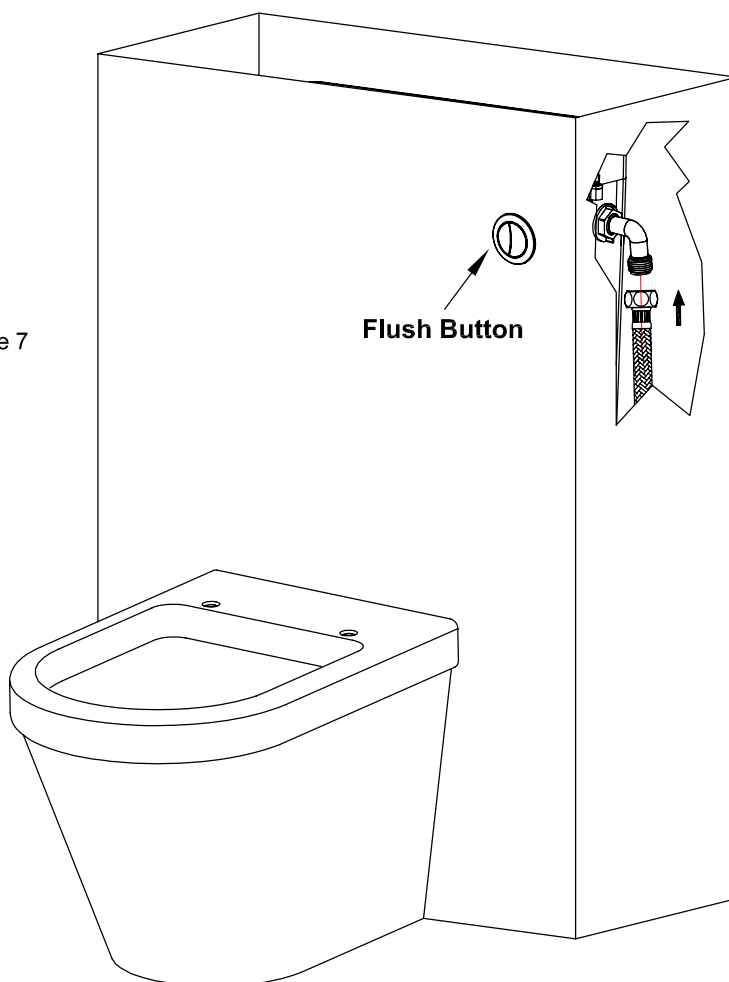


Access And Maintenance

I. The MyRoom™ Dual Flush Concealed Cistern has access for maintenance from either the top or the front.

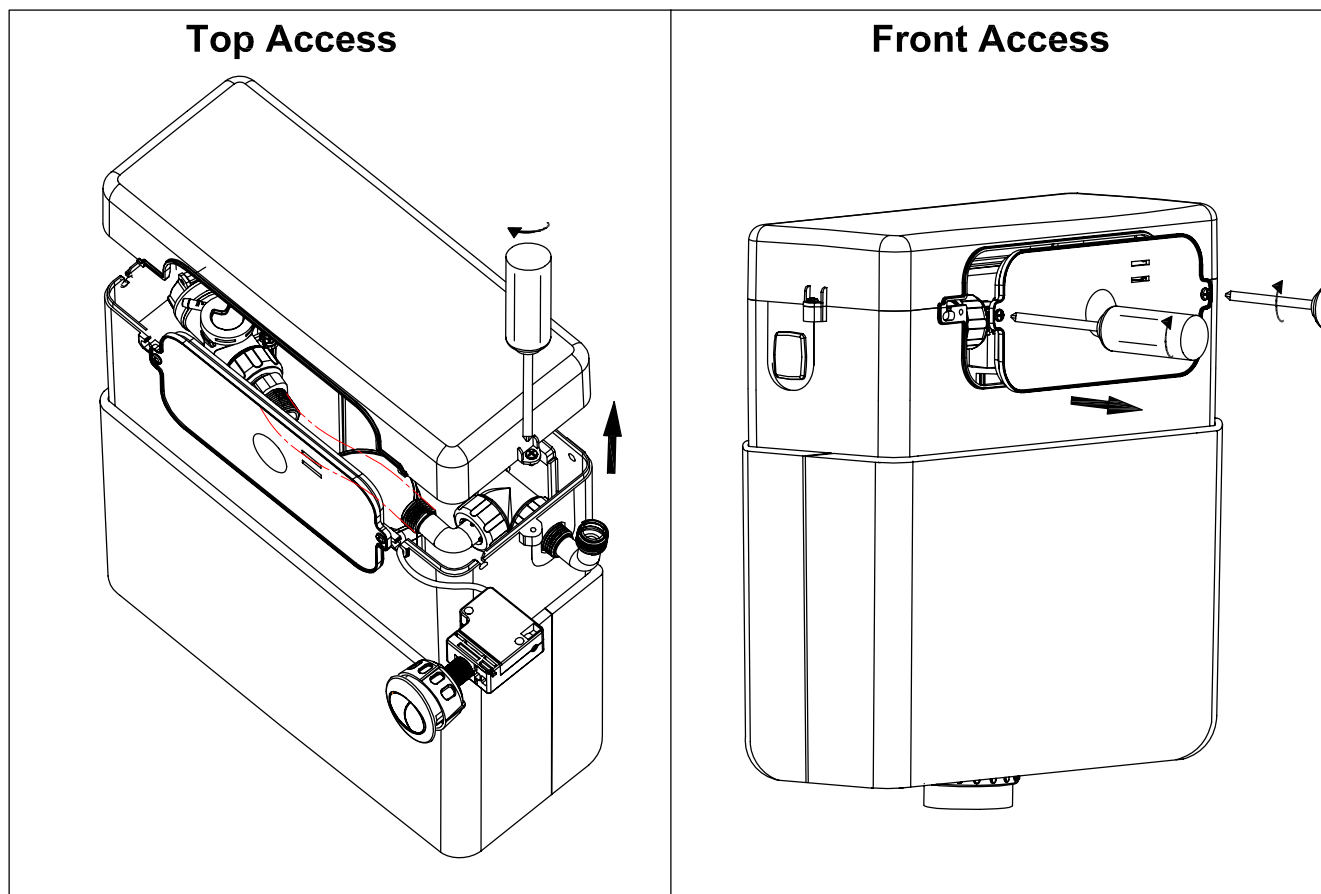

II. Please follow the procedures below in case you need to have access for maintenance.


The Front cover includes an Allen key that can be used to switch on/off the water supply from the control valve. The Allen key is clipped to the underneath of the front cover.

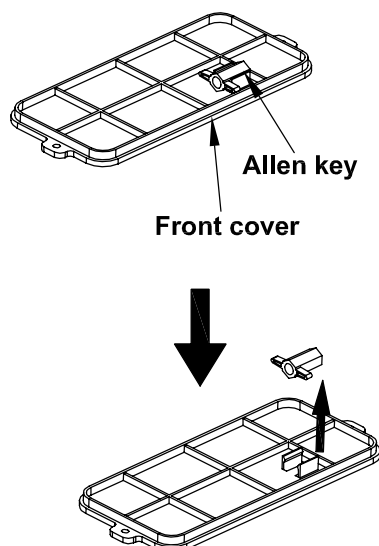

Switch off the water supply by turning clockwise the control valve with the supplied Allen key.


Parts can be removed for maintenance by reversing the installation steps as detailed in page 6 and page 7.

After maintenance, install the parts following the steps on page 6 and page 7. Switch on the water supply by turning the control valve anti-clockwise using the supplied Allen key.

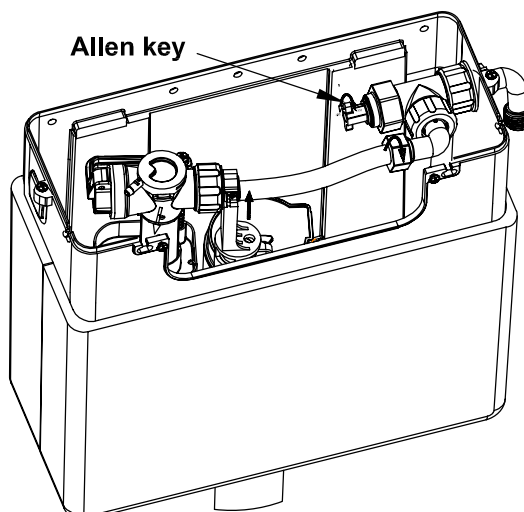

Inlet Valve Installation And Problem Solving

I. Inlet Valve Installation

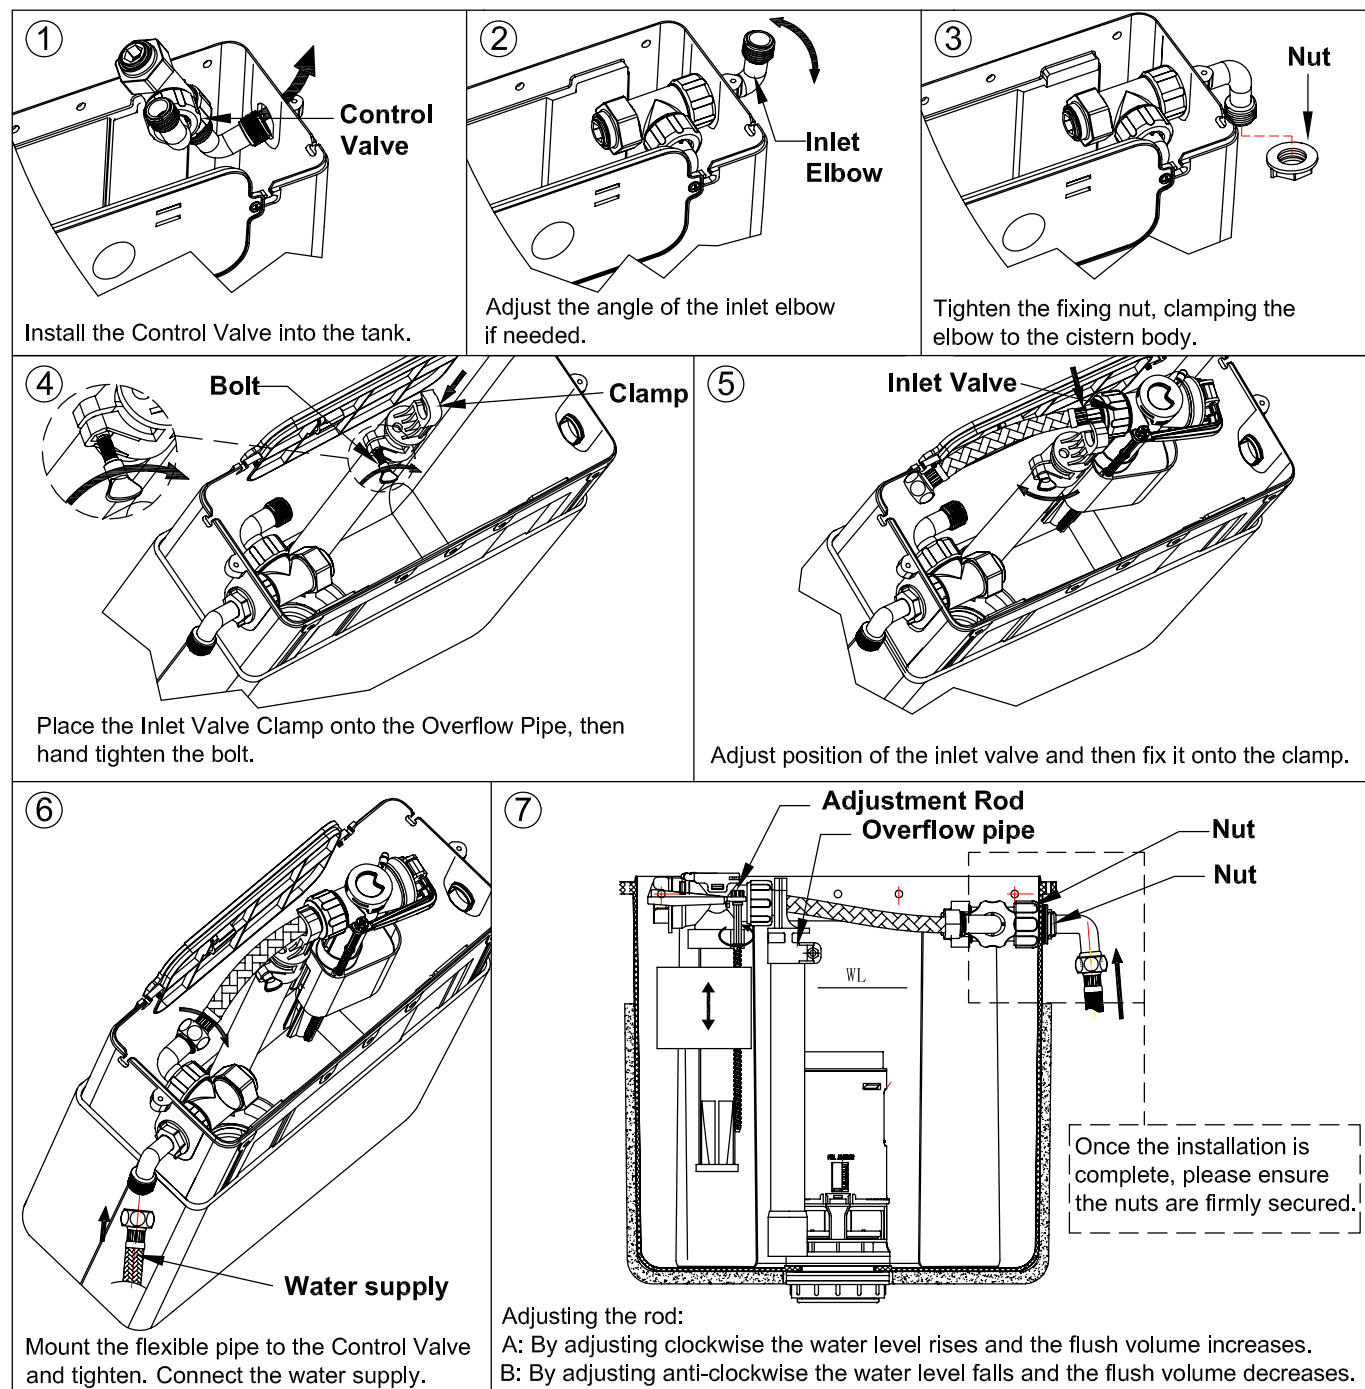

Note: 1. Ensure that the float operates freely after installation.


2. Flush the water to remove debris and impurities before connecting to the cistern.

II. Inlet Valve trouble shooting


Problem	Reason	Solution
Incorrect water level	Incorrect adjustment.	Readjust the water level correctly.
Inlet Valve does not work	The switch of control valve is closed.	Turn anti-clockwise with the supplied Allen key.
	The filter is blocked.	Clean the filter located between the flexible pipe and the inlet valve.
	The Float cup can not move freely.	Reposition the inlet valve.
Leakage	The Inlet Valve fixing nut has not been tightened.	Tighten the nut.

Flush Valve Installation And Trouble Shooting

I. Flush Valve Installation

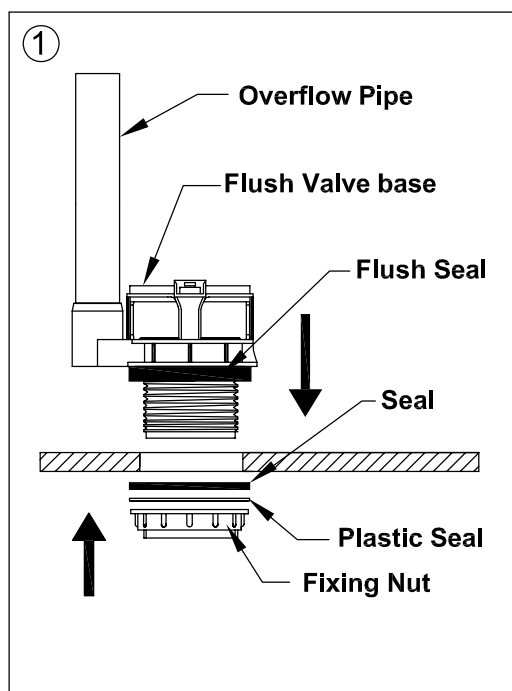

Insert flush valve base and flush seal through the tank flush hole. Tighten with the fixing nut, clamping the seals in place.

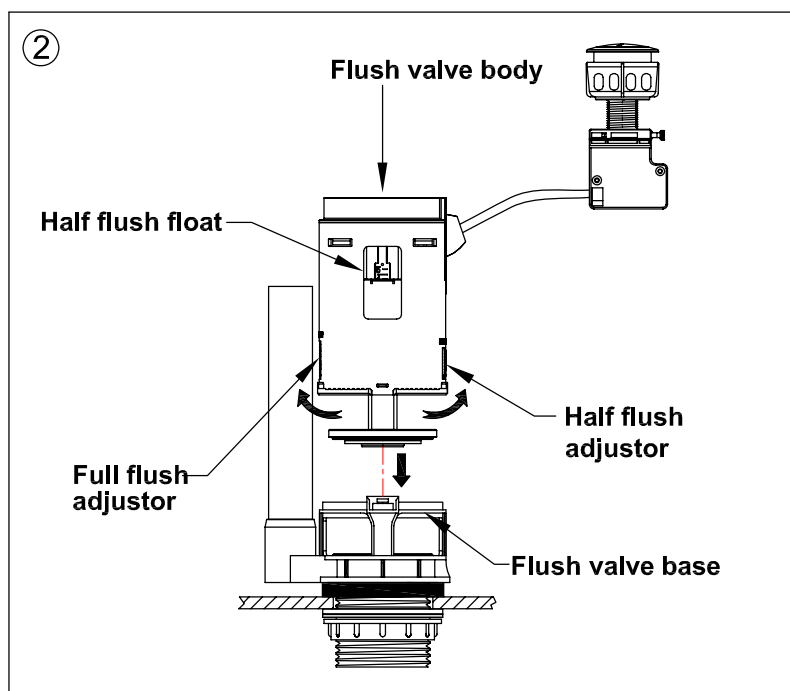

Insert flush valve body into the flush valve base, rotating it until it fixes onto the clip.

1. Adjust half flush float:

- ① Move float up, flush volume decreases.
- ② Move float down, flush volume increases.

2. Adjust full flush adjustor:

- ① Move adjustor up, flush volume decreases.
- ② Move adjustor down, flush volume increases.

3. Adjust half flush adjustor:

- ① Move adjustor up, flush volume decreases.
- ② Move adjustor down, flush volume increases.

* Half flush float is for major adjustment of flush volume.

The half flush adjustor is for minor adjustment of flush volume.

II. Flush Valve Problem Solution

Problem	Reason	Solution
Leakage	1. Incorrect installation. 2. Flush valve base not correctly fitted to flush valve body. 3. Flush valve body is stuck.	1. Install again according to the correct installation procedure. 2. Remove and wash flush valve body.
Can't flush, low flush or half flush volume	Cable is distorted.	1. Unkink the cable. 2. Adjust flush valve body.
Half flush water level is too high or too low.	Water level is adjusted incorrectly.	Adjust water level.

Note:

1. Please read these instructions carefully to avoid damage to the cistern, and to ensure correct installation.
2. Do not use bleach or bleach based cleaning products in the cistern. These will cause damage to the seals.
We cannot be held responsible or liable for any failure which results from the use of bleach based products.
3. Water temperature range +2C to +45C.
4. Water pressure 0.2 to 8 bar.